


| MACH 4 SL CARBON |                                                    |                                                         |                  |       |
|------------------|----------------------------------------------------|---------------------------------------------------------|------------------|-------|
| Hardware         |                                                    |                                                         |                  |       |
| NUMBER           | PART NUMBER                                        | DESCRIPTION                                             | TORQUE           | *     |
| 3                | FP-UDH-TA-12MM-BLK-V1-R1                           | Universal Rear Derailleur Hanger                        |                  |       |
| 4                | -                                                  | Universal Rear Derailleur Hanger Bolt                   | 25 Nm (18 lb·ft) |       |
| 5                | -                                                  | Universal Rear Derailleur Hanger Washer                 |                  |       |
| 6                | FP-LNK-UL-51MM-V1-R1                               | 51mm Upper Link                                         |                  |       |
| 7                | FP-LNK-LL-BLK-V3-R1                                | 34mm Out-to-Out Lower Link                              |                  |       |
| 8                | FP-BRG-6902-LLUMAXECN                              | 28mm 6902 Ext'd Max-E Bearing                           |                  | R     |
| 9                | FP-BRG-6900-LLUMAXE                                | 22mm 6900 Ext'd Max-E Bearing                           |                  | R     |
| 10               | FP-BLT-M14*20-BLK-V2-R2                            | M14x20 Lower Link Bolt                                  | 35 Nm (27 lb·ft) | L     |
| 11               | FP-BLT-M10*18-BLK-V1-R2                            | M10x18 Upper Link Bolt                                  | 13 Nm (10 lb·ft) | L     |
| 12               | FP-BLT-M8*45.7-BLK-V2                              | M8 Front Shock Bolt for 30.1mm Shock Spacing            | 13 Nm (10 lb·ft) | G / L |
| 13               | FP-CLM-MECH-FRM-V1                                 | Internal Routing Cable Clamp                            |                  |       |
| 14               | FP-CVR-MECH-FRM-V2                                 | Internal Routing Hole Cover                             |                  |       |
| 15               | FP-CLM-DUAL-FRM-V1                                 | Internal Routing Dual Clamp                             |                  |       |
| 16               | FP-SCW-FLT-M3*10                                   | M3x10 Cable Clamp Screw (Included w/ Clamp)             |                  |       |
| 17               | FP-CVR-CLAMP-SPACER-V1-R1                          | Cable Port Rubber Shim                                  |                  |       |
| 18               | FP-GDE-DI2-7*8*2.5*2.5                             | 7x8mm Di2 Wire Guide                                    |                  |       |
| 19               | FP-CVR-FLV-TT-V1-R1                                | Fox Live Cover Plate                                    |                  |       |
| 20               | FP-WSH-FLV-CNTRLMT-V1-R1                           | Fox Live Controller Mount Spacer                        |                  |       |
| 21               | FP-CVR-FLV-ACC-V1-R1                               | Fox Live Accelerometer Cover                            |                  |       |
| 22               | FP-PLG-FLV-RL-V1-R1                                | Fox Remote Lockout Plug                                 |                  |       |
| 23               | FP-CVR-DI2-DT-V1                                   | Di2 Downtube Battery Holder                             |                  |       |
| 24               | FP-SCW-FLT-M5*16                                   | M5x16 Di2 DT Battery Cover Screws (Included with cover) |                  |       |
| 25               | FP-PRO-4SLV2-CS-V1-R1                              | Mach 4 Carbon SL Chainstay Protector                    |                  |       |
| 26               | FP-PRO-4SLV2-SS-V1-R1                              | Mach 4 Carbon SL Seatstay Protector                     |                  |       |
| 27               | FP-PRO-4SLV2-UR-V1-R1                              | Mach 4 Carbon SL Upright Protector                      |                  |       |
| 28               | FP-PRO-4SLV1-DT-XS-M-V1-R1                         | Mach 4 Carbon SL Downtube Protector (XS/SM/MD)          |                  |       |
| 28               | FP-PRO-4SLV1-DT-L-XL-V1-R1                         | Mach 4 Carbon SL Downtube Protector (LG/XL)             |                  |       |
| 29               | PIVOT WB BOLTS V2                                  | M5x0.8x18 Zinc Plated Steel Water Bottle Bolts          |                  |       |
| 30               | FP-GKT-FOX-REMOTE-V1-R1                            | Fox Remote Shock Gasket                                 |                  |       |
| 31               | FP-PRO-34MM-LL-V2-R1                               | 34mm Lower Link Protector                               |                  |       |
| 32               | FRAME SIZE STICKER - XS/SM/MD/LG/XL                | Frame Size Sticker                                      |                  |       |
| Axles            |                                                    |                                                         |                  |       |
| NUMBER           | PART NUMBER                                        | DESCRIPTION                                             | TORQUE           | *     |
| 101              | 148MM THROUGH AXLE V4                              | 148mm UDH Rear Axle                                     | 15 Nm (11 lb·ft) | G     |
| 102              | -                                                  | 12mm Axle Washer (Included w/ Axle)                     |                  |       |
| Bike Care        |                                                    |                                                         |                  |       |
| *                | PRODUCT TYPE                                       | RECOMMENDED PRODUCT                                     |                  |       |
| G                | Grease                                             | Motorex Bike Grease 2000                                |                  |       |
| L                | Thread Locker**                                    | Loctite Thread Locker #243 (or equivalent)              |                  |       |
| G/L              | Grease (Bolt Shaft) / Thread Locker (Bolt Threads) | See Above                                               |                  |       |
| A                | Anti-Seize                                         | Motorex Copper Paste                                    |                  |       |
| R                | Retaining Compound                                 | Loctite Retaining Compound #620 (or equivalent)         |                  |       |

\*\*Threadlocker should always be applied to the corresponding female threads for the bolt specified



ATTENTION: Lower links are marked with an arrow on the non-drive side. The link must be oriented where the arrow points to the front triangle.

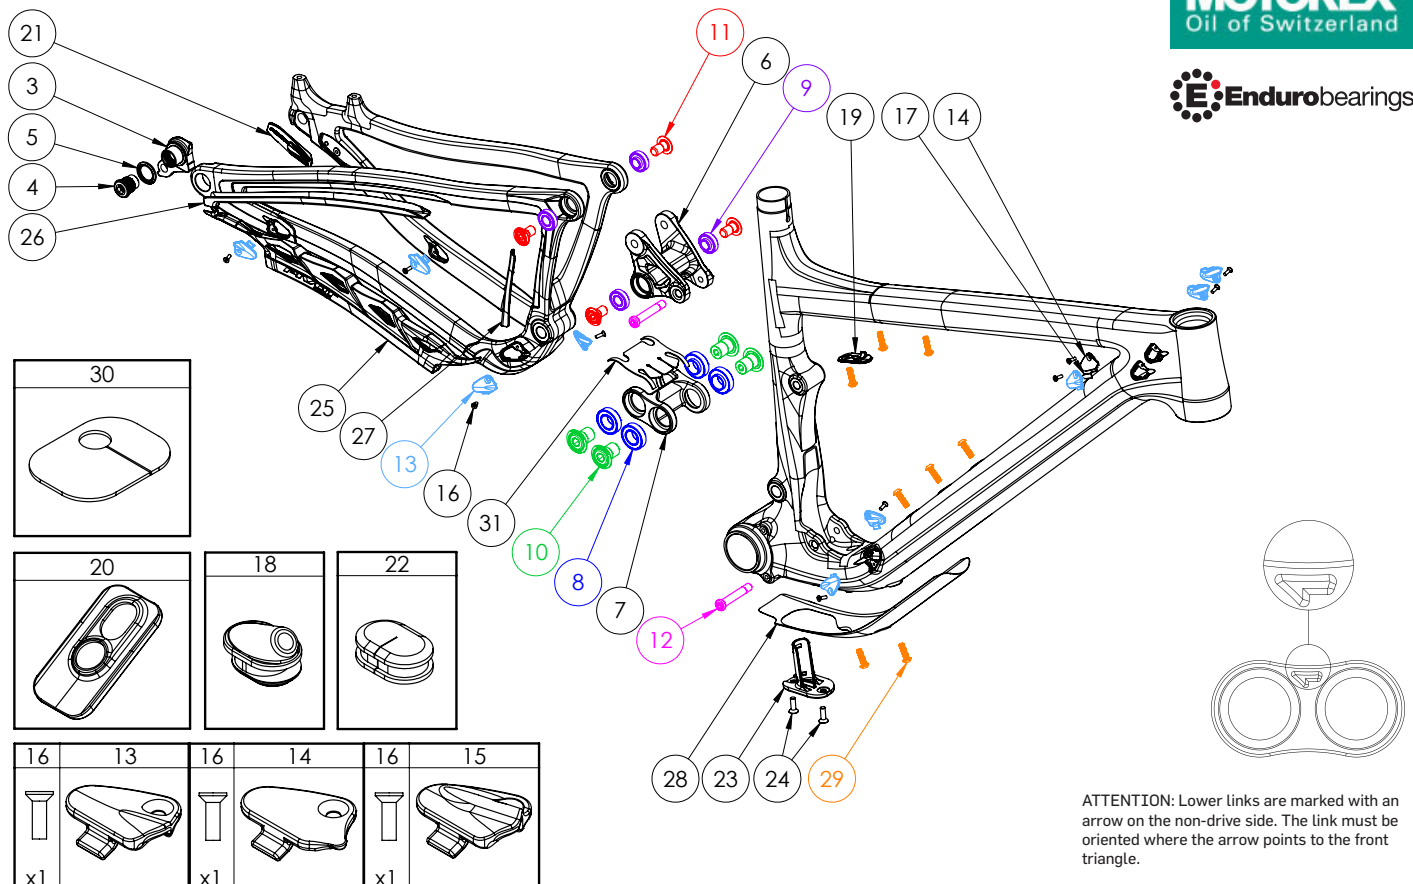