| MACH 429 TRAIL V2 CARBON | | | | |
|---|---|---|---|---|
| Hardware | | | | |
| **NUMBER** | **PART NUMBER** | **DESCRIPTION** | **TORQUE** | * |
| 5 | FP-RDH-TA-12MM-BLK-V3 | Rear Derailleur Hanger 12mm TA | | |
| 6 | FP-SCW-SCK-M5*10 | M5x10 Rear Derailleur Hanger Screw | 7 Nm (5 lb·ft) | G |
| 7 | FP-LNK-UL-59MM-DSM-V1 | 59mm Direct Shock Mount Upper Link | | |
| 8 | FP-LNK-LL-34MM-EXT-V1 | 34mm Out-to-Out Extended Lower Link | | |
| 9 | FP-BRG-6902-LLUMAXECN | 28mm 6902 Ext'd Max-E Bearing | | R |
| 10 | FP-BLT-M14*17-BLK-V1-R2 | M14x17 Link Bolt | 35 Nm (27 lb·ft) | L |
| 11 | FP-BLT-M14*20-BLK-V2-R2 | M14x20 Link Bolt | 35 Nm (27 lb·ft) | L |
| 12 | FP-BLT-M8*38-BLK-V2 | M8x38 Front Shock Bolt | 13 Nm (10 lb·ft) | G/L |
| 13 | FP-BLT-M8*40-BLK | M8x40 Rear Shock Bolt | 13 Nm (10 lb·ft) | G/L |
| 14 | FP-WSH-8I*12O*1W | M8 Shock Bolt Washer | | |
| 15 | FP-CLM-MECH-FRM-V1 | Internal Routing Cable Clamp | | |
| 16 | FP-CVR-MECH-FRM-V2 | Internal Routing Hole Cover | | |
| 17 | FP-SCW-FLT-M3*10 | M3x10 Cable Clamp Screw (Included w/ Clamp) | | |
| 18 | FP-CVR-DI2-DT-V1 | Di2 Downtube Battery Holder | | |
| 19 | FP-SCW-FLT-M5*16 | M5x16 Di2 DT Battery Cover Screws (Included with cover) | | |
| 20 | FP-PRO-M429TRLV2-DT-V1-R1 | Mach 429 Trail V2 Downtube Protector | | |
| 21 | FP-PRO-M429TRLV2-CS-V1-R1 | Mach 429 Trail V2 Chain Stay Protector | | |
| 22 | FP-PRO-M429TRLV2-SS-V1-R1 | Mach 429 Trail V2 Seat Stay Protector | | |
| 23 | FP-PRO-M429TRLV2-UR-V1-R1 | Mach 429 Trail V2 Upright Protector | | |
| 24 | PIVOT WB BOLTS V2 | M5x0.8x18 Zinc Plated Steel Water Bottle Bolts | | |
| 25 | PIVOT WB BOLT SPACER V2 | M5 Water Bottle Bolt Spacer | | |
| 26 | FP-PRO-34MM-EXT-LL-V1-R1 | 34mm Out to Out Extended Lower Link Protector | | |
| 27 | FRAME SIZE STICKER - XS/SM/MD/LG/XL | Frame Size Sticker | | |
| | | | | |
| Axles | | | | |
| **NUMBER** | **PART NUMBER** | **DESCRIPTION** | **TORQUE** | * |
| 101 | 157MM THROUGH AXLE V4 | 157mm Rear Axle | 15 Nm (11 lb·ft) | G |
| 102 | - | 12mm Axle Washer (Included w/ Axle) | | |
| | | | | |
| Bike Care | | | | |
| * | **PRODUCT TYPE** | **RECOMMENDED PRODUCT** | | |
| G | Grease | Motorex Bike Grease 2000 | | |
| L | Thread Locker** | Loctite Thread Locker #243 (or equivalent) | | |
| G/L | Grease (Bolt Shaft) / Thread Locker (Bolt Threads) | See Above | | |
| A | Anti-Seize | Motorex Copper Paste | | |
| R | Retaining Compound | Loctite Retaining Compound #620 (or equivalent) | | |

**Threadlocker should always be applied to the corresponding female threads for the bolt specified

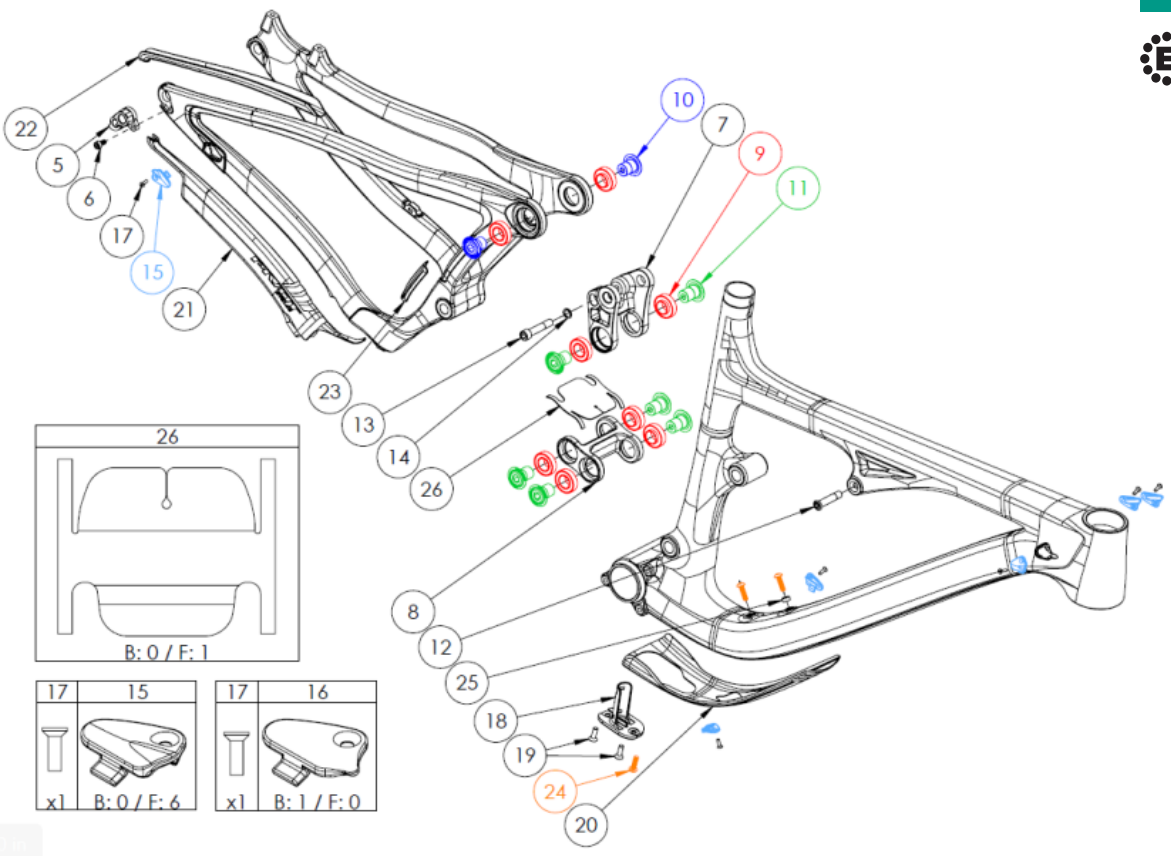




ATTENTION: Lower links are marked with an arrow on the non-drive side. The link must be oriented where the arrow points to the front triangle.