


MACH 5.5 CARBON				
Hardware				
NUMBER	PART NUMBER	DESCRIPTION	TORQUE	*
12	FP-RDH-TA-12MM-BLK-V3	Rear Derailleur Hanger 12mm TA		
13	FP-SCW-SCK-M5*10	M5x10 Rear Derailleur Hanger Screw	7 Nm (5 lb·ft)	G
14	FP-BLT-M8*54-BLK	M8x54 Front Shock Bolt	13 Nm (10 lb·ft)	G/L
15	FP-BRG-6902-LLUMAXECN	28mm 6902 Ext'd Max-E Bearing		R
16	FP-LNK-LL-BLK-V4-R1	34mm Out-to-Out Lower Link V2 (+6mm Front Width)		
17	FP-LNK-UL-60MM-DSM-V2	60mm Direct Shock Mount Upper Link		
18	FP-PIN-SHK-M8*150-BLK	15x57mm M8 Rear Shock Pin		G
19	FP-BLT-M8*12-BLK	M8x12 Rear Shock Bolt	13 Nm (10 lb·ft)	L
20	FP-WSH-SPC-M15*13	M15x13 Rear Shock Spacer		
21	FP-BLT-M14*17-BLK-V1-R2	M14x17 Upper Link Bolt	35 Nm (27 lb·ft)	L
22	FP-BLT-M14*20-BLK-V2-R2	M14x20 Lower Link Bolt	35 Nm (27 lb·ft)	L
23	FP-CLM-MECH-FRM-V1	Internal Routing Cable Clamp		
24	FP-CLM-DI2-FRM-V1	Internal Routing Di2 Clamp		
25	FP-CVR-MECH-FRM-V2	Internal Routing Hole Cover		
26	FP-CLM-DUAL-FRM-V1	Internal Routing Dual Clamp		
27	FP-SCW-FLT-M3*10	M3x10 Cable Clamp Screw (Included w/ Clamp)		
28	FP-PLG-DI2-7*8*2.5	7x8mm Di2 Plug		
29	FP-PLG-DI2-7*8*5	7x8mm Di2 Plug Ext'd		
30	FP-GDE-DI2-7*8*2.5*2.5	7x8mm Di2 Wire Guide		
31	FP-GDE-DI2-7*8*5*2.5	7x8mm Di2 Wire Guide Ext'd		
32	FP-PLG-MNT-6MM	6mm Plug for E-type FDM		
33	FP-CVR-DI2-DT-V1	Di2 Downtube Battery Holder		
34	FP-SCW-FLT-M5*16	M5x16 Di2 DT Battery Cover Screws (Included with cover)		
35	FP-PLG-CS-ACL-V1	Fox Live Chantistay Accelerometer Plug		
36	FOX LIVE SHOCKTAB COVER	Fox Live Shocktab Sticker		
37	FP-PRO-M55C-CS-V1-R1	Mach 5.5C Chainstay Protector		
38	FP-PRO-M55C-SS-V1-R1	Mach 5.5C Seatstay Protector		
39	FP-PRO-M55C-UR-V1-R1	Mach 5.5C Upright Protector		
40	FP-PRO-M55C-DT-V1-R1	Mach 5.5C Downtube Protector		
41	PIVOT WB BOLTS V2	M5x0.8x18 Zinc Plated Steel Water Bottle Bolts		
42	PIVOT WB BOLT SPACER V2	M5 Water Bottle Bolt Spacer		
43	FP-PRO-34MM-LL-V1-R1	34mm Lower Link V2 Protector		
44	FRAME SIZE STICKER - XS/SM/MD/LG/XL	Frame Size Sticker		
Axles				
NUMBER	PART NUMBER	DESCRIPTION	TORQUE	*
101	-	148mm Rear Axle	15 Nm (11 lb·ft)	G
102	-	12mm Axle Washer (Included w/ Axle)		
Bike Care				
*	PRODUCT TYPE	RECOMMENDED PRODUCT		
G	Grease	Motorex Bike Grease 2000		
L	Thread Locker**	Loctite Thread Locker #243 (or equivalent)		
G/L	Grease (Bolt Shaft) / Thread Locker (Bolt Threads)	See Above		
A	Anti-Seize	Motorex Copper Paste		
R	Retaining Compound	Loctite Retaining Compound #620 (or equivalent)		

**Threadlocker should always be applied to the corresponding female threads for the bolt specified



ATTENTION: Lower links are marked with an arrow on the non-drive side. The link must be oriented where the arrow points to the front triangle.

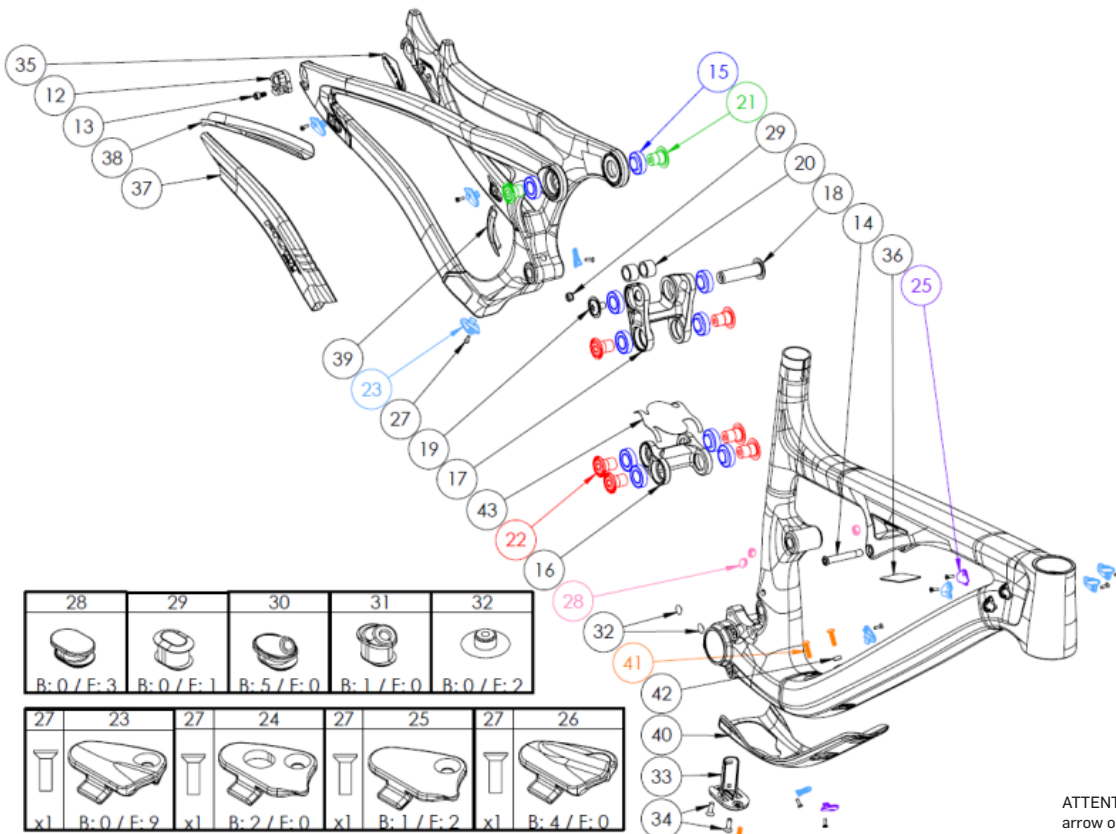

PIVOT
CYCLES