



MACH 429 SL CARBON V3				
Hardware				
NUMBER	PART NUMBER	DESCRIPTION	TORQUE	*
19	FP-LNK-LL-BLK-V2-R1	34mm In-to-Out Lower Link		
20	FP-BRG-6802-LLBMAX	6802 Std. Lower Link Rear Bearing		R
21	FP-SLV-LL-25MM	25mm Lower Link Bearing Sleeve		
22	FP-BLT-M8*20-BLK	M8x20 Upper Link Bolt	13 Nm (10 lb·ft)	L
23	FP-LNK-UL-50MM-V2-R2	50mm Out-to-Out Upper Link		
24	FP-CLM-MECH-FRM-V1	Internal Routing Cable Clamp		
25	FP-CLM-DI2-FRM-V1	Internal Routing Di2 Clamp		
26	FP-CVR-MECH-FRM-V2	Internal Routing Hole Cover		
27	FP-SCW-FLT-M3*10	M3x10 Cable Clamp Screw (Included w/ Clamp)		
28	FP-PLG-MECH-5.5MM	5.5mm Rubber Cable Plug		
29	FP-RDH-TA-12MM-BLK-V3	Rear Derailleur Hanger 12mm TA		
30	FP-SCW-SCK-M5*10	M5x10 Rear Derailleur Hanger Screw	7 Nm (5 lb·ft)	G
31	FP-PLG-DI2-7*8*5	7x8mm Di2 Plug Ext'd		
32	FP-GDE-DI2-7*8*5*2.5	7x8mm Di2 Wire Guide Ext'd		
33	FP-BRG-6902-LLUMAXECN	28mm 6902 Ext'd Max-E Bearing		R
34	FP-CVR-DI2-DT-V1	Di2 Downtube Battery Holder		
35	FP-SCW-FLT-M5*16	M5x16 Di2 DT Battery Cover Screws (Included with cover)		
36	FP-PLG-DI2-7*8*2.5	7x8mm Di2 Plug		
37	FP-GDE-DI2-7*8*2.5*2.5	7x8mm Di2 Wire Guide		
38	FP-BLT-M14*20-BLK-V2-R2	M14x20 Lower Link Front Bolt	35 Nm (27 lb·ft)	L
39	FP-BLT-M8*38-BLK-V2	M8x38 Front Shock Bolt	13 Nm (10 lb·ft)	G/L
40	FP-BRG-608-LLUMAXE	22mm OD 608 Ext'd Upper Link Bearing		R
41	FP-BLT-M14*66-BLK	M14x66 Lower Link Pin	35 Nm (27 lb·ft)	A
42	FP-BLT-M8*55-BLK	M8x55 Rear Shock Bolt	13 Nm (10 lb·ft)	L
43	FP-WSH-8I*120*1W	M8 Shock Bolt Washer (For Clevis Screw)		
44	FP-PRO-429CSLV2-DT-SM-V2-R1	Mach 429 Carbon Downtube Guard V2 (SM)		
44	FP-PRO-429CSLV2-DT-M-V2-R1	Mach 429 Carbon Downtube Guard V2 (MD)		
44	FP-PRO-429CSLV2-DT-L-V2-R1	Mach 429 Carbon Downtube Guard V2 (LG)		
44	FP-PRO-429CSLV2-DT-XL-V2-R1	Mach 429 Carbon Downtube Guard V2 (XL)		
45	FP-PRO-429C-CS-V2-R1	Mach 429 Carbon Chainstay Guard V3		
46	FP-PRO-429CSLV2-SS-V2-R1	Mach 429 Carbon Seatstay Guard V3		
47	PIVOT WB BOLTS V2	M5x0.8x18 Zinc Plated Steel Water Bottle Bolts		
48	PIVOT WB BOLT SPACER V2	M5 Water Bottle Bolt Spacer		
49	FRAME SIZE STICKER - XS/SM/MD/LG/XL	Frame Size Sticker		
Axles				
NUMBER	PART NUMBER	DESCRIPTION	TORQUE	*
101	DT SWISS 148 RWS	148x12mm RWS Thru Axle		
Bike Care				
*	PRODUCT TYPE	RECOMMENDED PRODUCT		
G	Grease	Motorex Bike Grease 2000		
L	Thread Locker**	Loctite Thread Locker #243 (or equivalent)		
G/L	Grease (Bolt Shaft) / Thread Locker (Bolt Threads)	See Above		
A	Anti-Seize	Motorex Copper Paste		
R	Retaining Compound	Loctite Retaining Compound #620 (or equivalent)		

**Threadlocker should always be applied to the corresponding female threads for the bolt specified



ATTENTION: Lower links are marked with an arrow on the non-drive side. The link must be oriented where the arrow points to the front triangle.

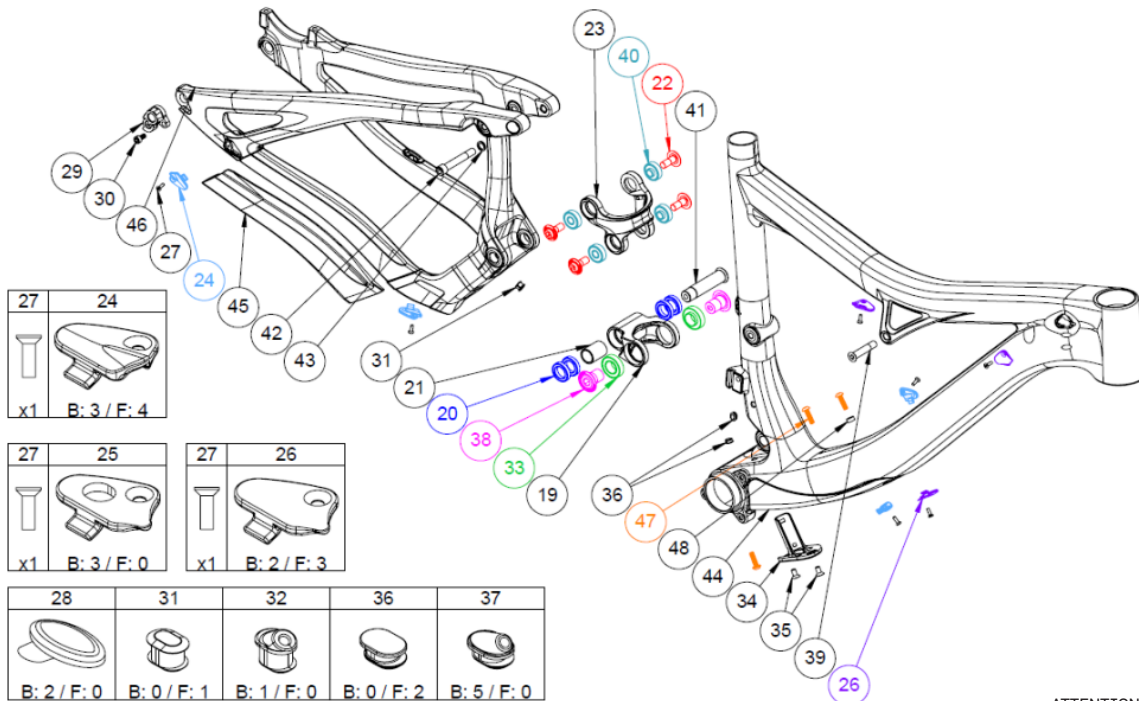

PIVOT
CYCLES