


TRAIL 429 CARBON 29 V3				
Hardware				
NUMBER	PART NUMBER	DESCRIPTION	TORQUE	*
3	FP-UDH-TA-12MM-BLK-V1-R1	Universal Rear Derailleur Hanger		
4	-	Universal Rear Derailleur Hanger Bolt	13 Nm (10 lb·ft)	
5	-	Universal Rear Derailleur Hanger Washer		
6	FP-LNK-UL-49.5-V1-R1	49.5mm Upper Link		
7	FP-LNK-LL-34MM-EXT-V1	34mm Out-to-Out Lower Link		
8	FP-BRG-6902-LLUMAXECN	28mm 6902 Extended Max-E Bearing		R
9	FP-BRG-6902-LLUMAX	28mm 6902 Standard Max Bearing		R
10	FP-BRG-6900-LLUMAXE	22mm 6900 Ext'd Max-E Bearing		R
11	FP-BLT-M8*45.7-BLK-V2	M8 Front Shock Bolt for 30.1mm Shock Spacing	13 Nm (10 lb·ft)	G/L
12	FP-BLT-M14*20-BLK-V2-R2	M14x20 Link Bolt	35 Nm (27 lb·ft)	L
13	FP-BLT-M10*16.5-BLK-V1	M10 Trunnion Mount Bolt	13 Nm (10 lb·ft)	L
14	FP-BLT-M14*20-BLK-V3-R2	M14x20 Flip Chip Bolt	35 Nm (27 lb·ft)	L
15	FP-NUT-FLIPCHIP-4.6MM-V1	4.6mm Flip Chip		G
16	FP-WSH-SPC-151*250*3W	M14x3mm Flip Chip Spacer		G
17	FP-CLM-MECH-FRM-V1	Internal Routing Cable Clamp		
18	FP-CVR-MECH-FRM-V2	Internal Routing Hole Cover		
19	FP-CLM-DUAL-FRM-V1	Internal Routing Dual Clamp		
20	FP-SCW-FLT-M3*10	M3x10 Cable Clamp Screw (Included w/ Clamp)		
21	FP-PLG-DI2-7*8*2.5	7x8mm Di2 Plug		
22	FP-GDE-DI2-7*8*2.5*2.5	7x8mm Di2 Wire Guide		
23	FP-CVR-FLV-TT-V1-R1	Fox Live Cover Plate		
24	FP-WSH-FLV-CNTRLMT-V1-R1	Fox Live Controller Mount Spacer		
25	FP-CVR-FLV-ACC-V1-R1	Fox Live Accelerometer Cover		
26	FP-MNT-TOOL-BLK-V1-R1	Topeak Tool Mount		
27	FP-SCW-FLT-M5*16	M5x16 Topeak Tool Mount Screws		
28	FP-MNT-TLPLG-BLK-V1-R1	Topeak Tool Mount Plug		
29	FP-PRO-TRAILV3-DT-XS/S-V1-R1	Trail429 V2 Downtube Protector (XS/SM)		
29	FP-PRO-TRAILV3-DT-M/L/XL-V1-R1	Trail429 V2 Downtube Protector (MD/LG/XL)		
30	FP-PRO-TRAILV3-CS-V1-R1	Trail429 V2 Chainstay Protector		
31	FP-PRO-TRAILV3-SS-V1-R1	Trail429 V2 Seatstay Protector		
32	FP-PRO-TRAILV3-UR-V1-R1	Trail429 V2 Upright Protector		
33	PIVOT WB BOLTS V2	M5x0.8x18 Zinc Plated Steel Water Bottle Bolts (XS)		
33	PIVOT WB BOLTS V2	M5x0.8x18 Zinc Plated Steel Water Bottle Bolts (SM)		
33	PIVOT WB BOLTS V2	M5x0.8x18 Zinc Plated Steel Water Bottle Bolts (MD/LG/XL)		
34	FP-PRO-34MM-EXT-LL-V3-R1	34mm Lower Link Protector		
35	FRAME SIZE STICKER - XS/SM/MD/LG/XL	Frame Size Sticker		
Axles				
NUMBER	PART NUMBER	DESCRIPTION	TORQUE	*
101	157MM THROUGH AXLE V4	157mm Rear Axle	15 Nm (11 lb·ft)	G
102	-	12mm Axle Washer (Included w/ Axle)		
Bike Care				
*	PRODUCT TYPE	RECOMMENDED PRODUCT		
G	Grease	Motorex Bike Grease 2000		
L	Thread Locker**	Loctite Thread Locker #243 (or equivalent)		
G/L	Grease (Bolt Shaft) / Thread Locker (Bolt Threads)	See Above		
A	Anti-Seize	Motorex Copper Paste		
R	Retaining Compound	Loctite Retaining Compound #620 (or equivalent)		

**Threadlocker should always be applied to the corresponding female threads for the bolt specified



ATTENTION: Lower links are marked with an arrow on the non-drive side. The link must be oriented where the arrow points to the front triangle.

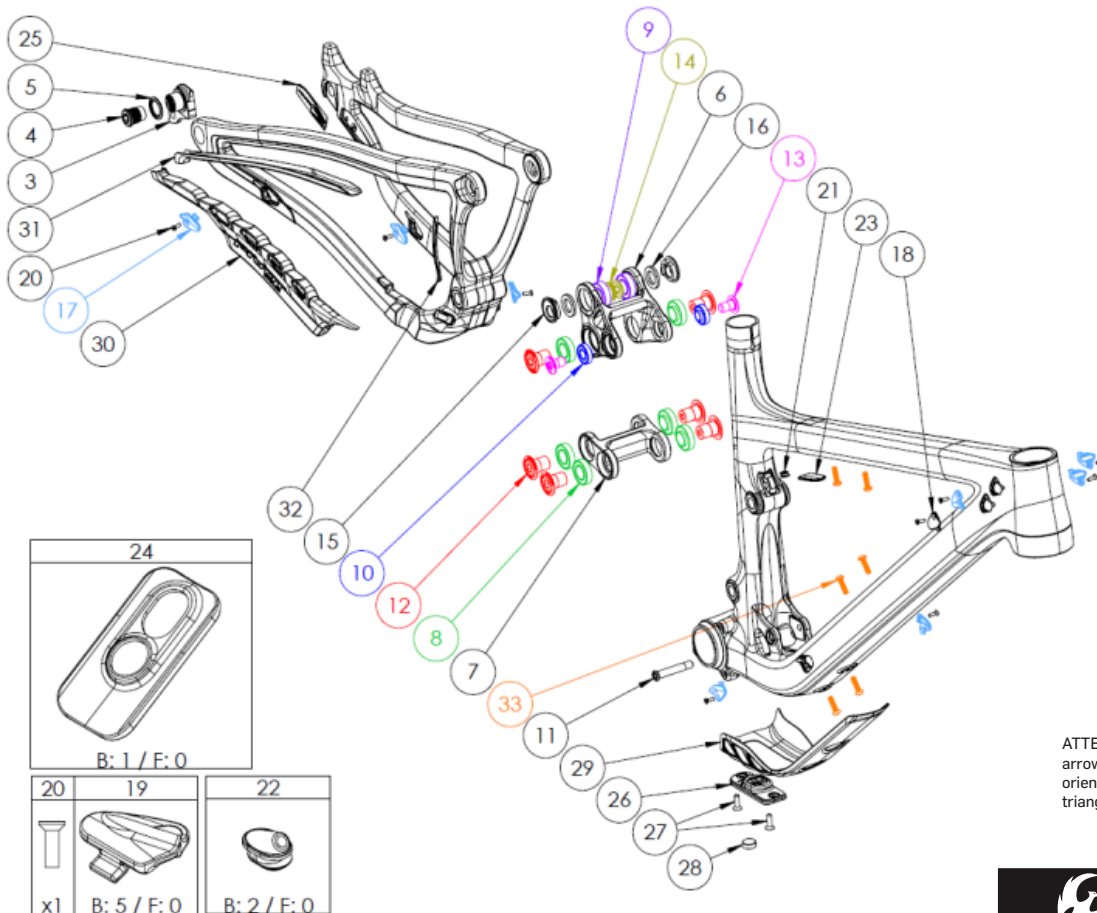

PIVOT
CYCLES